

Technical specifications FT460



Display	FT460
Size	46" TFT-LCD
Format	16:9
Resolution	1920:1080
LED life time	50.000 Hours
Contrast ratio	4000:1
Luminance	700 cd/m2
Response time	8ms(typ.)
Viewing angle	12 o'clock = 89°
	9 o'clock = 89°
	6 o'clock = 89°
	3 o'clock = 89°


I/O	Common features
Serial port	2x RS232 2x RS232/422/485
USB port	4x USB 2.0 2x USB 3.0
Power in	1x IEC C14 power connector (male)
Power out	5VDC 1A

Computer	Common features
CPU	4th generation Intel® Core™ i3-4100E processor 2.4 GHz
Chipset	Intel® HM86
System memory	4GB DDR3L-1600 (can be other size on request)
HDMI port	2x HDMI
Lan	2x 10/100/1000 Mbps

Storage	Common features
Type	64GB 2,5" SSD (can be other size on request)
Expansion type	Full-Size Mini PCI Express Mini Card with mSATA


Power supply	Common features
Voltage	100 - 240 VAC, 50/60 Hz
Power consumption	220 Watt (Max.)

Mechanical and environment	FT460
Cabinet	AISI 316 stainless steel
Dimensions (D, H, W)	100mm x 711,4mm x 1153mm
Weight	38 kg
IP Rating	IP65 (IP66 at cable input)
Working temperature	-5°C to + 35 °C
Storage temperature	-20°C to + 60 °C
Humidity	10% to 95% not condensing
Emission	EN 61000-6-3
Immunity	EN 61000-6-2

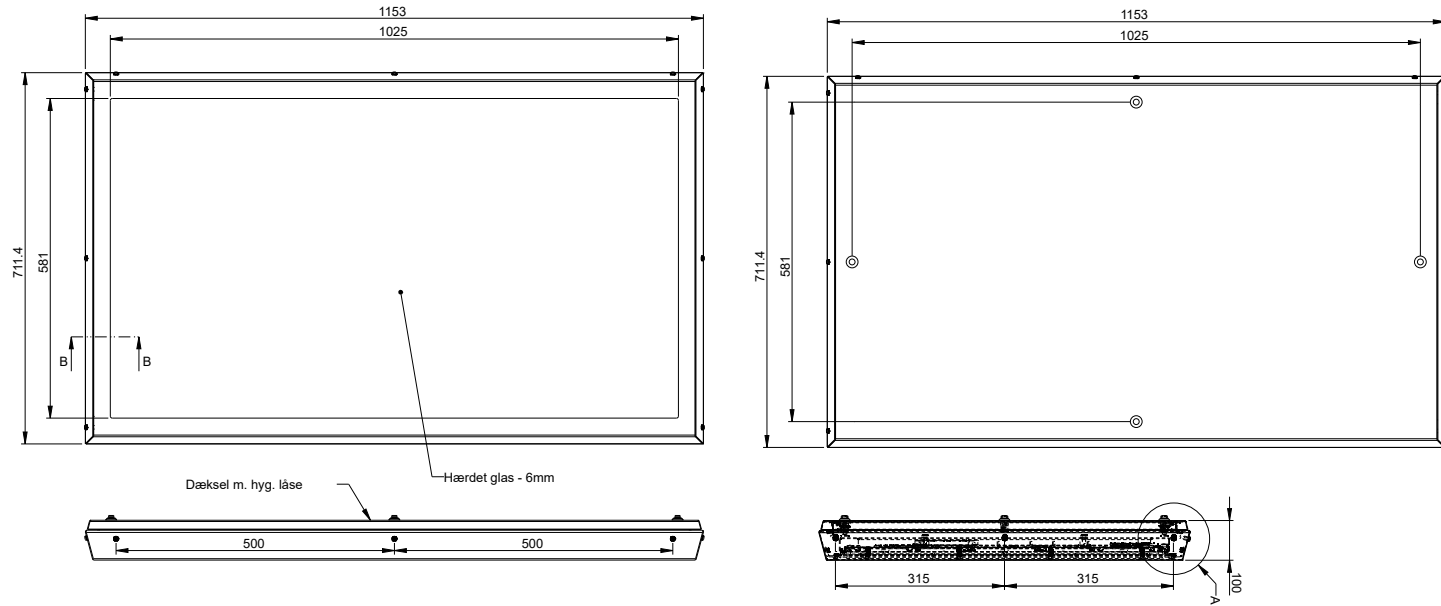

FT460

Mechanical drawing

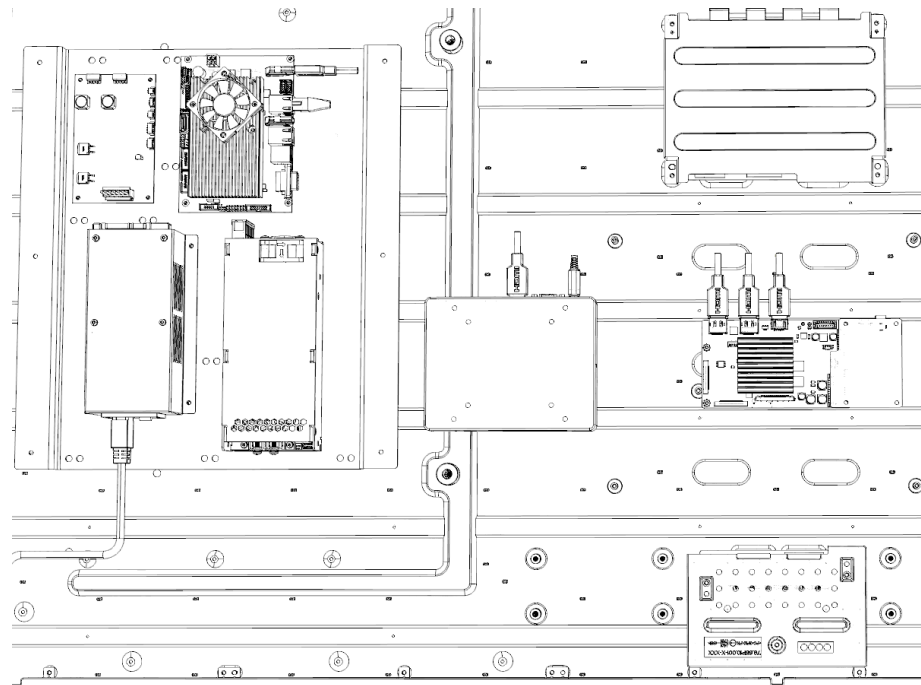

Connections

Mechanical drawing

Techon7 ApS
 Spettrupvej 1C
 DK-8722 Hedensted

+45 7060 2777
 techon7.dk